

QUALITY TOOLS THAT WORK FOR YOU®



5.5CFM

2 STAGE - FOR DEEP VACUUM

VACUUM PUMP



**TAKES OUT
MOISTURE**

**1/4" AND 3/8" MALE
FLARE INTAKE
FITTINGS WITH
TETHERED CAPS**



**CENTER BALANCED
HANDLE WITH
NON-SLIP GRIP**

**LOW
PROFILE
ON/OFF
ROCKER
SWITCH**




**OIL FILL PORT
AND EXHAUST
DOME**

**110V/220V
POWER
SELECTOR
SWITCH**


**LARGE
SIGHT GLASS
FOR EASY OIL
MONITORING**



**6 FT. REMOVABLE
POWER CORD**

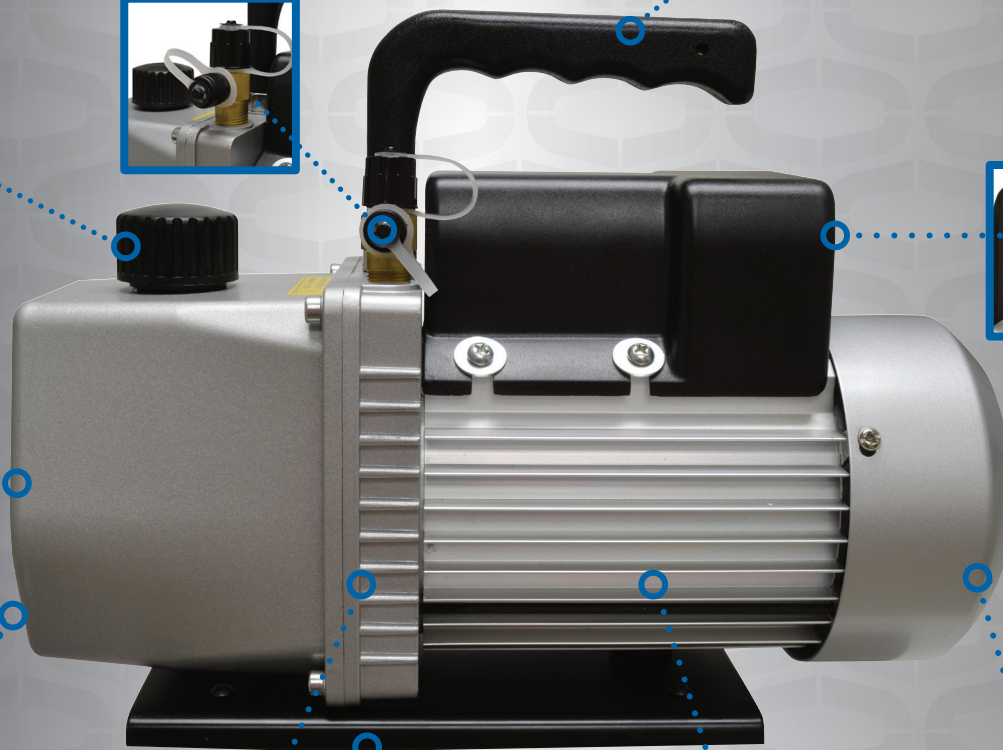

**EASY ACCESS
OIL DRAIN**



**HEAT
DISPERSING FINS**



**WIDE, STABLE
BASE**



**HEAT DISPERSING
MOTOR FINS**



**FAN COOLED
MOTOR**



2850 Ravenswood Road, Fort Lauderdale, FL 33312 U.S.A.
Customer Service: 800.323.2111 • 954.584.2000 • Fax: 954.587.0109
info@uniweld.com • www.uniweld.com



5.5 CFM


2 STAGE - FOR DEEP VACUUM

VACUUM PUMP

Uniweld's high performance U5VP2 Vacuum Pump brings the latest in vacuum pump technology and has been designed to provide long term reliable service. The 5.5 CFM two stage vacuum pump is built for deep vacuum service on Appliances, Residential A/C and Commercial Refrigeration Systems.



**TAKES OUT
MOISTURE**

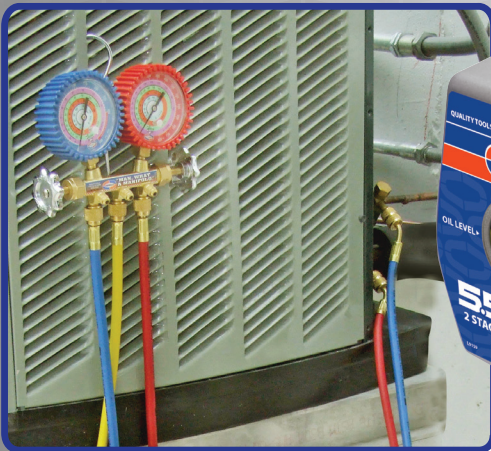

- 2-STAGE
- LIGHTWEIGHT
- POWERFUL
- COOLER RUNNING
- DEEP VACUUM



**UNIWELD
VACUUM PUMP OIL**

Part# 42005
(1) Quart (946 ml)
12 per case

Part# 42006
(1) Gallon (3.78 L)
6 per case

PART# U5VP2

Vacuum Pump Specifications

Free Air Displacement	5.5 cfm, 155 liter/min.
Number of Stages	2- Stage Rotary Vane
Factory Micron Rating	15 Microns
Intake Fittings (with check valve).....	1/4" and 3/8" M.F.
Thermal Overload Protection.....	1/2 H.P.
Voltage	110V/220V-50/60 Hz
Power Cord	72" (1.83 m)
Oil Capacity	11.1 oz. (350 ml)
Dimensions	12.5" x 4" x 9.5" 32.5 cm x 10 cm x 24 cm
Weight	20.0 lbs. (9.1 kg)
Shipping Weight	22.2 lbs. (10.8 kg)



2850 Ravenswood Road, Fort Lauderdale, FL 33312 U.S.A.
Customer Service: 800.323.2111 • 954.584.2000 • Fax: 954.587.0109
info@uniweld.com • www.uniweld.com



SCAN WITH
SMARTPHONE

FY0059