




PRODUCT DIMENSIONS & SPECIFICATIONS

DX SERIES ALUMINUM DEDICATED HORIZONTAL COILS

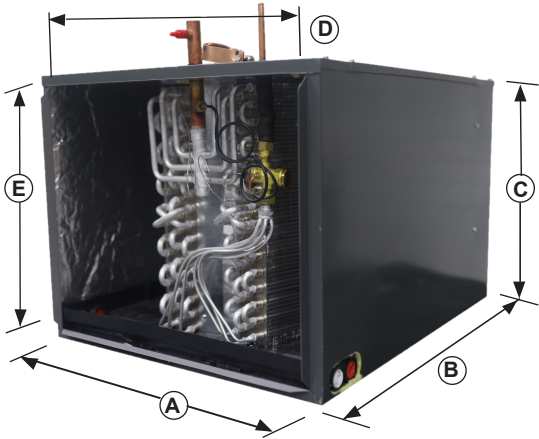

STANDARD SPECIFICATIONS

- Rifled aluminum tubing, enhanced aluminum fins.
- Air pressure tested at 500 psi, leak tested with helium, then sealed and nitrogen pressurized.
- Inlet and outlet dimensions are identical (without end caps).
- Externally mounted flowrater body with Schrader valve for hiss-testing or internally mounted factory-installed TXV.
- Refrigerant lines exit from the top of the coil.
- Patent-pending three-piece service door
- Embossed galvanized cabinets standard. (OEM painted cabinet available.)
- Fully insulated cabinets with faced insulation.
- Heavy duty plastic drain pan with four 3/4" FPT condensate drains (two per side).
- AHRI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with R-22 and R-410a when proper metering device is used.
- Ten-year limited warranty with registration.

Representative image only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice.

| COIL MODEL | R410A PISTON SIZE | DIMENSIONS | | | | | SHIPPING INFORMATION | | |
|------------|-------------------|--------------------|--------------------|---------------------|-------------------|--------------------|-----------------------|-------|----------|
| | | CABINET WIDTH (A)" | CABINET DEPTH (B)" | CABINET HEIGHT (C)" | INSIDE WIDTH (D)" | INSIDE HEIGHT (E)" | SHIPPING WEIGHT (LBS) | | SKID QTY |
| | | | | | | | 3 ROW | 4 ROW | |
| DX24A* | 0.055 | 21 | 22 | 14 1/2 | 20 | 13 1/2 | 35 | 39 | 16 |
| DX24B* | 0.055 | 21 | 22 | 15 | 20 | 14 | 37 | 42 | 16 |
| DX24E* | 0.055 | 21 | 27 | 17 1/2 | 20 | 16 1/2 | 50 | 57 | 16 |
| DX30A* | 0.059 | 21 | 22 | 15 | 20 | 14 | 37 | 42 | 16 |
| DX30E* | 0.059 | 21 | 27 | 17 1/2 | 20 | 16 1/2 | 50 | 57 | 16 |
| DX36A* | 0.068 | 21 | 22 | 15 | 20 | 14 | 37 | 42 | 16 |
| DX36B* | 0.068 | 21 | 27 | 17 1/2 | 20 | 16 1/2 | 47 | 53 | 16 |
| DX36C* | 0.068 | 21 | 22 | 17 1/2 | 20 | 16 1/2 | 41 | 47 | 16 |
| DX36D* | 0.068 | 21 | 32 | 21 | 20 | 20 | 66 | 75 | 6 |
| DX36E* | 0.068 | 21 | 27 | 21 | 20 | 20 | 56 | 65 | 12 |
| DX42C* | 0.074 | 21 | 27 | 21 | 20 | 20 | 58 | 67 | 12 |
| DX42D* | 0.074 | 21 | 32 | 21 | 20 | 20 | 65 | 74 | 6 |
| DX48A* | 0.080 | 21 | 27 | 17 1/2 | 20 | 16 1/2 | 49 | 56 | 16 |
| DX48B* | 0.080 | 21 | 27 | 21 | 20 | 20 | 56 | 64 | 12 |
| DX48C* | 0.080 | 21 | 27 | 21 | 20 | 20 | 56 | 65 | 12 |
| DX48D* | 0.080 | 21 | 32 | 21 | 20 | 20 | 66 | 75 | 6 |
| DX60A* | 0.089 | 21 | 27 | 21 | 20 | 20 | 58 | 67 | 6 |
| DX60B* | 0.089 | 21 | 32 | 21 | 20 | 20 | 66 | 75 | 6 |
| DX60C* | 0.089 | 21 | 32 | 24 1/2 | 20 | 23 1/2 | 77 | 90 | 6 |
| DX60D* | 0.089 | 21 | 32 | 25 | 20 | 24 | 79 | 91 | 6 |
| DX60E* | 0.089 | 21 | 32 | 25 | 20 | 24 | 82 | 95 | 6 |
| DX60F* | 0.089 | 21 | 32 | 24 1/2 | 20 | 23 1/2 | 69 | 79 | 6 |

Phone: 281.441.6500
 Toll Free: 800.423.9007
 Fax: 281.441.6510
www.aspenmfg.com



* For complete warranty details visit www.aspenmfg.com.