

## Compact Clamp Meters

SC220, SC240, SC260

### Ultimate in Convenience and Affordability

The SC200 Compact Clamp Meters combine a lot of big meter functions into a compact, easy-to-use design, and are great for testing HVACR electrical measurements.

The SC200s help you save time with the new Auto Select mode. Simply set the dial and connect your leads, the clamp meter will automatically select the appropriate measurement depending on what it detects.

The high temperature resistance allows you to move from a cold freezer to a hot rooftop and get accurate temperature measurements that lesser thermometers cannot measure properly.

- Volts AC/DC
- 400 Amps AC
- Microamps DC (SC220)
- Temperature F°/C° (SC240/SC260)
- Capacitance (SC240/SC260)
- Non-contact voltage
- 40 Mega Ohm with 0.01 resolution
- Continuity
- Diode test
- Max/Min/Hold
- LCD backlight (SC260)
- True RMS (SC260)
- Low battery indicator
- Sturdy magnet (SC260)



SC260



SC220




SC240



SC260

### Included

- Wrap tab type K thermocouple - ATB1 (SC240, SC260)
- Deluxe silicone lead set with gold plated tips and removable sheath - ADLS2
- Padded case - ANC4
- 9V battery
- Velcro strap (SC240, SC260)

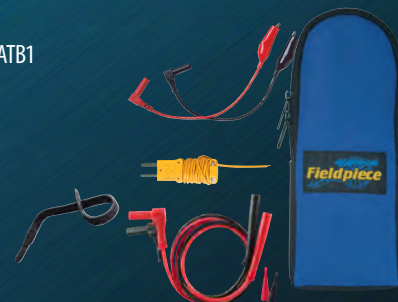

SC220	SC240	SC260	Function
●	●	●	Volts AC/DC
		●	True RMS
●	●	●	400 Amps AC
		●	Magnetic Hanger
	●	●	Temperature °F/°C
	●	●	Capacitance
●			Microamps DC
●	●	●	Non Contact Voltage
●	●	●	40 Mega Ohm with 0.1 Resolution
●	●	●	Continuity
●	●	●	Diode Test
●	●	●	Max/Min
●	●	●	Hold
		●	LCD Backlight
●	●	●	Low Battery Indicator
		●	Battery: 9V, 150 hrs
●	●		Battery: 9V, 200 hrs
●	●	●	Compliance with UL 3rd Edition