

## Screw-Holding Screwdrivers

- Starts and drives screws with one hand when working in hard-to-reach spaces



Cat. No.	Tip Type	Shank Type	Shank Length	Overall Length
32215	1/4" (6.4 mm) Cabinet	Round	7" (17.8 cm)	11.25" (28.6 cm)
32216	#2 Phillips	Round	7" (17.8 cm)	11.25" (28.6 cm)


## Terminal Block Screwdriver

Includes core Cushion-Grip™ Screwdriver features plus:

- Provides exact fit for terminal block screws
- Tip is up to 19% stronger than competitors and provides 76% higher torque value than the required ASME B107 Standard




Cat. No.	Tip Type	Shank Type	Shank Length	Overall Length
612-4	1/8" (3.2 mm) Cabinet	Round	4" (10.2 cm)	7.75" (19.7 cm)

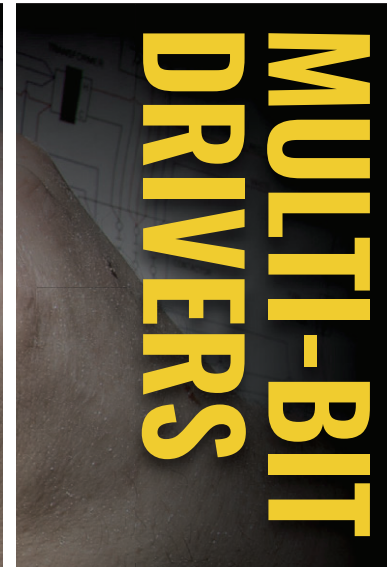

## Multi-Bit Screwdriver/Nut Drivers

- Integrated screwdriver/nut driver shaft holds popular tips and converts nut driver sizes, with comfortable Cushion-Grip™ handle
- Cat. No. 32500MAG features strong, Rare-Earth magnets to securely hold bits and fasteners
- Cat. No. 32527 includes unique style bit for installation/removal of common TR-4 Schrader® valves and aggressive thread extractor tip for backing out broken cores which is great for HVAC and other industrial applications
- Cat. Nos. 32561 and 32562 compact design features standard 1-1/4" (3.2 cm) shaft allowing easy access to tight work spaces
- Cat. No. 32559 and 32560 have extended shafts and blades to provide 39% longer reach

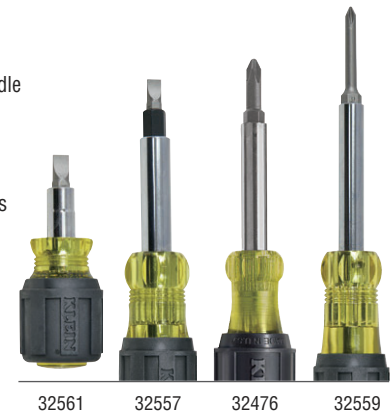

Cat. No.	Description	Nut Driver Sizes	Phillips Bits	Slotted Bits	Square Bits	Hex Bits	TORX® Bits	Other Bits	Shank Length	Overall Length
32500	11-in-1	3/8", 5/16", 1/4"	#1, #2	1/4" (6.4 mm), 3/16" (4.8 mm)	#1, #2	—	T10, T15	—	3" (7.6 cm)	7.25" (18.4 cm)
32500MAG	11-in-1 Magnetic	3/8", 5/16", 1/4"	#1, #2	1/4" (6.4 mm), 3/16" (4.8 mm)	#1, #2	—	T10, T15	—	3" (7.6 cm)	7.8" (19.8 cm)
★ 32500HD	11-in-1 Impact Rated Driver	1/2", 3/8", 5/16", 1/4"	#1, #2	1/4" (6.4 mm), 3/16" (4.8 mm)	#1, #2	—	T25	—	3.63" (9.2 cm)	8" (20.3 cm)
32527	11-in-1 w/Schrader®	3/8", 5/16", 1/4"	#1, #2	1/4" (6.4 mm), 3/16" (4.8 mm)	#1, #2	—	—	Schrader® Valve Insertion, Core Removal	3" (7.6 cm)	7.75" (19.7 cm)
32476	5-in-1	5/16"	#1, #2	1/4" (6.4 mm), 3/16" (4.8 mm)	—	—	—	—	4" (10.2 cm)	7.75" (19.7 cm)
32477	10-in-1	5/16", 1/4"	#1, #2	1/4" (6.4 mm), 3/16" (4.8 mm)	#1, #2	—	T10, T15	—	4" (10.2 cm)	7.75" (19.7 cm)
32557	10-in-1 Heavy Duty	1/4", 5/16", 3/8"	#1, #2	1/4" (6.4 mm), 3/16" (4.8 mm)	#1, #2	3/8"	—	—	2.953" (7.5 cm)	7.891" (20 cm)
32559	6-in-1 Extended Reach	1/4", 5/16"	#1, #2	1/4" (6.4 mm), 3/16" (4.8 mm)	—	—	—	—	4.109" (10.4 cm)	9.109" (23.1 cm)
32560	6-in-1 Extended Reach	1/4", 5/16"	#2	1/4" (6.4 mm)	#1, #2	—	—	—	4.109" (10.4 cm)	10" (25.4 cm)
32561	6-in-1 Stubby	1/4", 5/16"	#1, #2	1/4" (6.4 mm), 3/16" (4.8 mm)	—	—	—	—	1.266" (3.2 cm)	3.25" (8.3 cm)
32562	6-in-1 Stubby	1/4", 5/16"	#2	3/16" (4.8 mm)	#1, #2	—	—	—	1.266" (3.2 cm)	3.406" (8.7 cm)

TORX® is a registered trademark of Acument Intellectual Properties, LLC. Schrader® is a registered trademark of Schrader International, Inc.



Additional bits and replacement bits can be found on page 60

Pliers  
Strippers, Cutters, and Crimpers  
Drivers and Wrenches  
Conduit Tools and Measurement  
Tool Kits  
Safety, PPE and Comfort  
Job Site Accessories  
Tool Storage  
Voice/Data/Video  
Test and Measurement  
Power Tools and Accessories  
Lifting, Pulling and Structural