

# MULTI-BIT SCREWDRIVERS



## 10-in-1 Folding Screwdriver/Nut Drivers

10-FOLD™

- Conveniently folds up for easy storage or to fit into your pocket
- Each driver arm contains four interchangeable bit styles and two nut drivers
- Unfold each driver arm up to a full 180° for straight on driving power, or at 90° for extra leverage on stubborn fasteners
- Quick release button easily unlocks a fully extended driver arm



32535

32534  
Schrader®



32535  
Standard



32536  
TORX®



32537  
Tamperproof TORX®



32538  
Standard Hex



32539  
Metric Hex



Cat. No.	Nut Driver Sizes	Phillips Bits	Slotted Bits	Square Bits	Hex Bits	TORX® Bits	Other Bits	Handle Color	Overall Length
32534	5/16", 1/4"	#1, #2	3/16" (4.8 mm), 1/4" (6.4 mm)	#1, #2	—	—	Schrader® Valve Core Removal/Installation - Extractor	Blue	8.75" (22.2 cm)
32535	5/16", 1/4"	#1, #2	3/16" (4.8 mm), 1/4" (6.4 mm)	#1, #2	—	T10, T15	—	Black	9.594" (24.4 cm)
32536	5/16", 1/4"	—	—	—	—	T6, T7, T8, T10, T15, T20, T25, T27	—	Green	9.75" (24.8 cm)
32537	5/16", 1/4"	—	—	—	—	T7, T8, T9, T10, T15, T20, T25, T27	—	Green	9.594" (24.4 cm)
32538	5/16", 1/4"	—	—	—	1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16"	—	—	Red	9.594" (24.4 cm)
32539	5/16", 1/4"	—	—	—	0.9 mm, 1.3 mm, 1.5 mm, 2 mm, 2.5 mm, 3 mm, 4 mm, 5 mm	—	—	Blue	9.75" (24.8 cm)

Schrader® is a registered trademark of Schrader-Bridgeport International, Inc., TORX® is a registered trademark of Acument Intellectual Properties, LLC.

## Interchangeable Insulated Screwdrivers

- Securely and easily release the blade with a quick twist of the lock collar
- Interchangeable blades with a slim-tip to fit tight terminal blocks
- Handle and blade have a 1000-Volt insulation rating
- A layer of orange impact and flame resistant insulation protects from electric shock
- Meets or exceeds ASTM F1505 standards for insulation



32288



32286

TWIST FOR A  
FAST, EASY  
BLADE CHANGE




Cat. No.	Description	Tip Size	Shank Length	Overall Length	Interchangeable Screwdriver Set
32286	Insulated Flip-Blade	#1 Phillips & 3/16" (4.8 mm) Slotted	3.5" (8.9 cm)	8.2" (20.8 cm)	32288 5-Pc
32287	Insulated Flip-Blade	#1, #2 Square	3.5" (8.9 cm)	8.2" (20.8 cm)	—
32293	Insulated Flip-Blade	#2 Phillips & 1/4" (6.4 mm) Slotted	3.5" (8.9 cm)	8.2" (20.8 cm)	—
13156	Single-Ended Replacement Blade, 2-Pack	#2 Phillips & 1/4" (6.4 mm) Slotted	3.5" (8.9 cm)	7.58" (19.3 cm)	●
13157	Double-Ended Replacement Blade, 3-Pack	#1 Phillips & 3/16" (4.8 mm) Slotted, #2 Phillips & 1/4" (6.4 mm) Slotted, #1, #2 Square	3.5" (8.9 cm)	7.48" (19.0 cm)	●

Set includes handle and carrying pouch.

## Slide Drive™ Screwdriver/Nut Drivers

- Unique, patented Slide Drive™ tip switches from 1/4" size to 5/16" size
- Magnetic regardless of which driver is selected
- Twist the thumb nut to lock tip setting
- U.S. Patent 7,654,175 B2

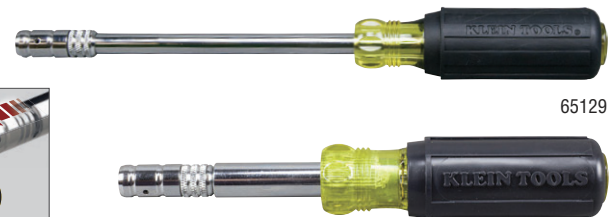

65129

32596



Cat. No.	Nut Driver Sizes	Phillips Bits	Slotted Bits	Other Bits	Shank Length	Overall Length
65129	1/4" Magnetic, 5/16" Magnetic	—	—	—	6" (15.2 cm)	10.25" (26 cm)
65131	1/4" Magnetic, 5/16" Magnetic	—	—	—	1.5" (3.8 cm)	3.359" (8.5 cm)
32596	1/4" Magnetic, 5/16" Magnetic, 1/4", 3/8" Hollow	#2	1/8" (3.2 mm), 1/4" (6.4 mm)	Schrader® Valve Insertion/Core Removal	3.25" (8.3 cm)	7.5" (19.1 cm)

Schrader® is a registered trademark of Schrader-Bridgeport International, Inc.



Additional bits and replacement bits can be found on page 60

www.kleintools.com > 800-553-4676

57

Pliers  
Strippers, Cutters, and Crimpers  
Drivers and Wrenches  
Conduit Tools and Measurement  
Tool Kits  
Safety, PPE and Comfort  
Jobsite Accessories  
Tool Storage  
Voice/Data/Video  
Test and Measurement  
Power Tools and Accessories  
Lifting, Pulling and Structural