


# CUSHION-GRIP™ NUT DRIVERS

Meets or exceeds applicable ASME / ANSI and MIL specifications

Premium chrome-plated shaft  
for smooth feel and corrosion resistance

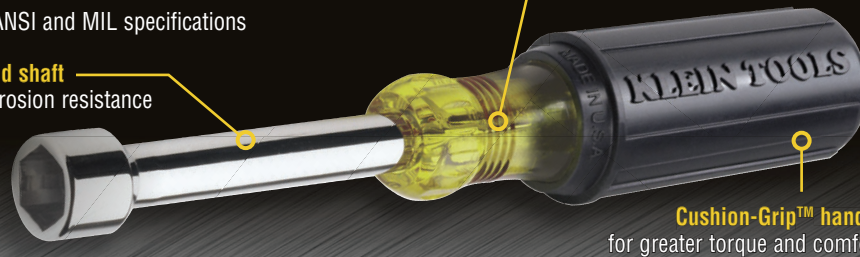

Internal flanges provide solid,  
twist-resistant shaft anchor

Cushion-Grip™ handle  
for greater torque and comfort

Handle end is also  
color coded for  
easy identification



Tip-Ident™ quickly  
identifies size and  
orientation

## Magnetic-Tip Hollow-Shaft Nut Drivers

Includes core Cushion-Grip™ Nut Driver features plus:

- Exclusive hollow shaft\* design with Rare-Earth magnetic tip features unobstructed pass-through, even on long bolts



630-3/8M



Cat. No.	Nut Driver Sizes	Shaft Length	Color Code	Overall Length
610-1/4M	1/4"	1.5" (3.8 cm)	Red	3.5" (8.9 cm)
610-5/16M	5/16"	1.5" (3.8 cm)	Yellow	3.5" (8.9 cm)
630-3/16M	3/16"	3" (7.6 cm)	Black	6.75" (17.2 cm)
630-1/4M	1/4"	3" (7.6 cm)	Red	6.75" (17.2 cm)
630-5/16M	5/16"	3" (7.6 cm)	Yellow	6.75" (17.2 cm)
630-11/32M	11/32"	3" (7.6 cm)	Green	6.75" (17.2 cm)
630-3/8M	3/8"	3" (7.6 cm)	Blue	6.75" (17.2 cm)
630-7/16M	7/16"	3" (7.6 cm)	Brown	7.313" (18.6 cm)
630-1/2M	1/2"	3" (7.6 cm)	Red	7.313" (18.6 cm)
646-3/16M	3/16"	6" (15.2 cm)	Black	9.75" (24.8 cm)
646-1/4M	1/4"	6" (15.2 cm)	Red	9.75" (24.8 cm)
646-5/16M	5/16"	6" (15.2 cm)	Yellow	9.75" (24.8 cm)
646-11/32M	11/32"	6" (15.2 cm)	Green	9.75" (24.8 cm)
646-3/8M	3/8"	6" (15.2 cm)	Blue	9.75" (24.8 cm)
646-7/16M	7/16"	6" (15.2 cm)	Brown	10.313" (26.2 cm)
646-1/2M	1/2"	6" (15.2 cm)	Red	10.313" (26.2 cm)
618-1/4M	1/4"	18" (45.7 cm)	Red	21.75" (55.3 cm)
618-5/16M	5/16"	18" (45.7 cm)	Yellow	21.75" (55.3 cm)

\*3/16" magnetic nut driver does not have a hollow shaft.

### Cushion-Grip™ Nut Driver Sets

631M 7-Pc	647M 7-Pc	630M 2-Pc	646M 2-Pc	610M 2-Pc
—	—	—	—	●
—	—	—	—	●
●	—	—	—	—
●	—	●	—	—
●	—	●	—	—
●	—	—	—	—
●	—	—	—	—
●	—	—	—	—
—	●	—	—	—
—	●	—	●	—
—	●	—	●	—
—	●	—	—	—
—	●	—	—	—
—	●	—	—	—
—	—	—	—	—
—	—	—	—	—

