

QUALITY TOOLS THAT GO TO WORK WITH YOU®



LIGHTWEIGHT!

UVP1.5 VACUUM PUMP

POWERFUL!

**COOLER
RUNNING!**

**WIDE MOUTH
OIL PORT AND
PUMP EXHAUST**

**CENTER MOUNTED
HANDLE FOR BALANCE**

**DUAL INTAKE FITTING
1/4" FLARE & 1/2" ACME
WITH
TETHERED CAPS**

**LARGE
CAPACITY OIL
RESERVOIR**

**POWERFUL
LOW DECIBEL
FAN COOLED
MOTOR**

**LARGE
SIGHT GLASS
FOR EASY OIL
MONITORING**

**MOTOR
AIR VENT**

**EASY ACCESS
OIL DRAIN**

**MOLDED PLASTIC BASE
WITH RUBBER FEET FOR
DURABILITY AND
VIBRATION CONTROL**

**WIDE, STABLE
FOOTPRINT**

**UVP1.5-110
UVP1.5-220**

**TWO STAGE
FOR
DEEP VACUUM!**




**UNIWELD®
PRODUCTS, INC.**
FT. LAUDERDALE
FL 33312 U.S.A.
www.uniweld.com



UVP1.5 VACUUM PUMP



Uniweld's high performance UVP Vacuum Pump has been designed and engineered to provide you with reliable service and the latest in vacuum pump technology. The UVP 1.5 pump is built for deep vacuum service on appliances, A/C, automotive and commercial systems using CFC, HCFC and HFC refrigerants in conjunction with mineral oil, ester oil, alkybenzene oil and PAG oil as lubricants.

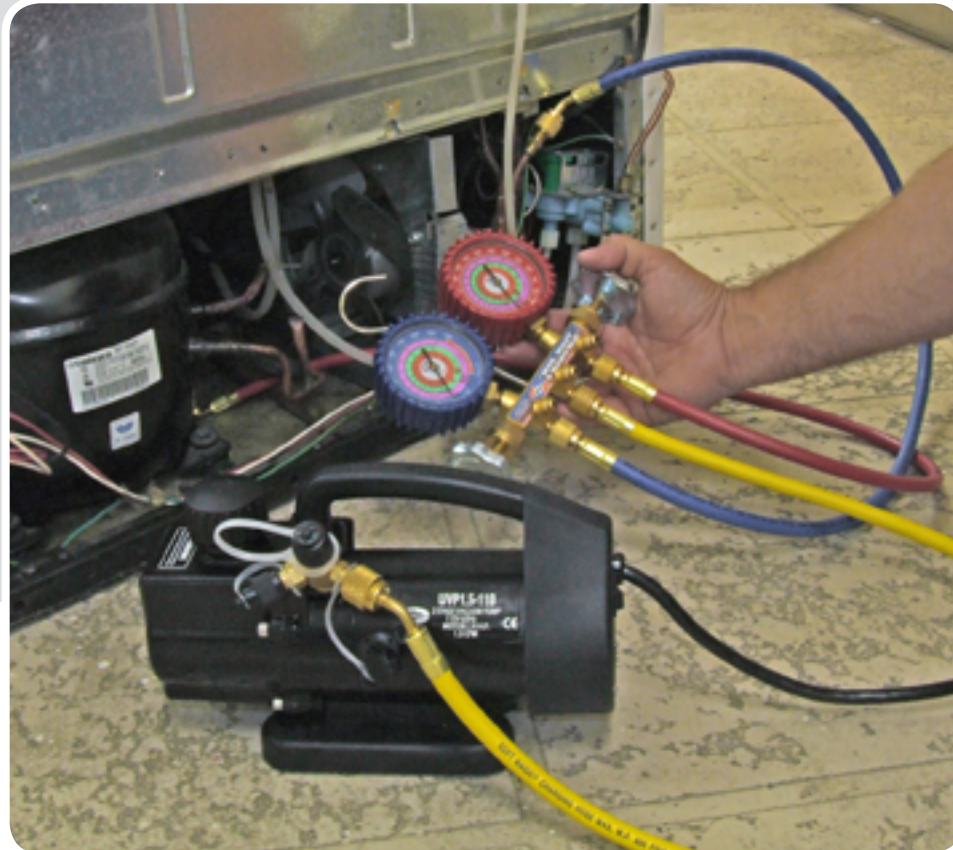

Part#s:
UVP1.5-110
UPC 42170
UVP1.5-220
UPC 42169

Pump Specifications	UVP1.5
Free Air Displacement	1.5 CFM, 40.5 liter/min.
Number of Stages	2-Stage Rotary Vane
Field Micron Rating	38 Microns
Intake Fittings	1/4" Male Flare & 1/2" Acme
Thermal Overload Protection	1/4 HP
Voltage	110/220V - 50/60Hz
Oil Capacity	4.7 Ounces (140 ml)
Power Cord	72" (1.83m)
Dimensions	10.23" x 3.50" x 6.40" 26 cm x 9 cm x 16.5 cm
Weight	10 Lbs. (4.54 kg)
Shipping Weight	14 Lbs. (6.35 kg)
Color	Black



**USE ONLY
PREMIUM UNIWELD
VACUUM PUMP OIL**
Available in Quarts
(.946 liter) 12 per case
#42005 and
Gallons (3.78 liters)
6 per case #42006



UNIWELD PRODUCTS, INC.
2850 Ravenswood Road, Fort Lauderdale, FL 33312
Customer Service: 800.323.2111 • 954.584.2000
www.uniweld.com • info@uniweld.com