


# JOB LINK<sup>®</sup> SYSTEM DUAL PORT MANOMETERS

## Experience Untethered Freedom

The revolutionary Job Link<sup>®</sup> System Manometer probes give HVACR pros the freedom to work the way they want to — unrestricted by long hoses, so technicians get readings from optimal locations on every system, every time. Short hose length keeps things neat, and independent sensors allow for direct placement on test ports.

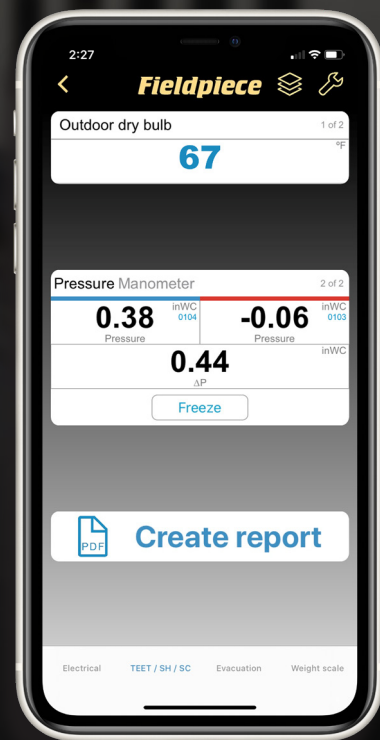

\*iPhone Not Included


## Job Link<sup>®</sup> System Dual Port Manometer Kit, JL3KM2

- Reliable Pressure Regardless of Location
- Measure Real-time Pressure Drops
- Find Inlet and Outlet Gas Pressures
- Switchable P1 - P2 Indicator
- Job Link<sup>®</sup> System App Compatible
- Easy Zero to Atmosphere

## Do More with Less Clutter

View static pressures or gas pressures from the new Fieldpiece manometer probes directly on the Job Link App -- up to 1000' away! Unlike traditional dual port manometers, the Job Link® System Dual Port Manometer Kit, JL3KM2 probes work independently so you don't have to bother with long hoses. This modular freedom also gives you real-time differential pressures from across the job site.

- Reliable pressure regardless of location
- Long range wireless
- All-in-one static, gas and draft pressure
- Accurate and stable measurements
- Individual pressure readouts
- Find Inlet and Outlet gas pressures
- Switchable P1 – P2 indicator
- Job Link® System app compatible
- Easy zero to atmosphere

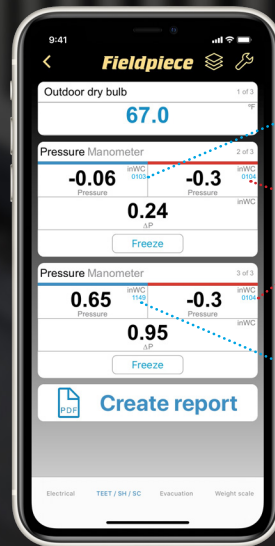

0103

0104

1149

Monitor total external static pressure, filter and evaporator coil pressure drops at the same time with the Job Link App.

JL3MN  
Serial Numbers

### Dual Port Manometers, JL3KM2

<b>Wireless Range</b>	1000 feet line of sight, obstructions affect distance
<b>Wireless Frequency</b>	2.4 GHz
<b>Battery</b>	2 AAA (included)
<b>Battery Life</b>	150 hours typical alkaline
<b>Auto Power Off</b>	2 hours (can be disabled)
<b>Minimum Device Requirement</b>	BLE 4.0 devices running iOS® 7.0 or Android™ 5.0
<b>Best Accuracy and Range</b>	inWC: ±0.02 on 0.00 to ±2.00 (±1.5% FS on 2.00 to ±60.00); mmWC: ±0.5 on 0.0 to ±51.0 (±1.5% FS on 51.0 to ±1500.0);
<b>Maximum Overload Pressure</b>	305 inWC (11 psi)